

LOCAL TSUNAMI WARNING SYSTEM IN SOUTH KOREA AND ITS ONGOING IMPROVEMENT

Sun-Cheon Park, Jun-Whan Lee, Eun Hee Park

National Institute of Meteorological Research, Korea Meteorological Administration

We introduce local tsunami warning system in operation of the Korea Meteorological Administration and some developing algorithms for tsunami warning against the Pacific tsunamis and for tsunami observation. These systems may be contributed to early tsunami warning and the reduction of tsunami hazard in South Korea.

INTRODUCTION

The Korean peninsula experienced damage by tsunami originated in Japan. Large Japanese earthquakes (M7.5~8) affected to the eastern coast of the peninsula by the tsunami in 1940, 1964, 1983 and 1993. Among them, the 1983 Akita tsunami generated by M7.7 earthquake produced loss of lives as well as property damage with 2~5 m high waves (Choi et al., 2009). Influenced by the 1983 tsunami, the Korea Meteorological Administration (KMA) started to operate tsunami warning system and issued tsunami warning when the M7.8 earthquake occurred in 1993 driving no loss of lives. Since then, the tsunami warning system of KMA has been modified and is still under improvement to take action against large Pacific tsunamis. In this paper, we will introduce the status of tsunami warning system of KMA and the on-going improvement.

LOCAL TSUNAMI WARNING SYSTEM

KMA has developed tsunami warning system based on scenario tsunami database to forecast tsunamis in surrounding seas. Earthquakes at 5,965 locations (Fig. 1 left) with magnitudes of 6.0 ~ 9.0 in 0.2 interval were assumed and the tsunami was simulated. Geometries of the fault planes near the Japanese Islands were assumed using previous studies and those in other areas were assumed to be parallel to the coastal lines of the peninsula. Then database was constructed with tsunami arrival time and maximum height at about 950 points around the coastal lines at a depth of 50 m. When an earthquake occurs, tsunami information is searched from the database (Fig. 1 right) and tsunami warning is issued for some major cities along the coastal line.

Limitation of present tsunami warning system is that only the information on several major cities can be provided. Therefore we reconstructed tsunami database to have the information of tsunami arrival time and maximum height at about 3,200 grid points close to the coastal lines. For the tsunami simulation, we used COMCOT (Cornell Multi-grid COupled Tsunami model)

and the unit tsunami method (Lee et al., 2005; Kim et al., 2013). We also classified 25 districts for tsunami forecast according to marine weather forecast regions of KMA. Tsunami information would be provided in district base in the near future (Fig. 2) by dividing the grid points (about 3,200) into the classified 25 districts and taking the earliest tsunami arrival time and the range of tsunami heights in each district.

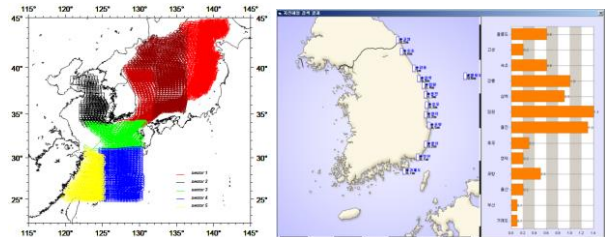


Figure 1. (left) Distribution of assumed fault planes for M7.8 earthquake. (right) Example of searched result of scenario tsunami database.

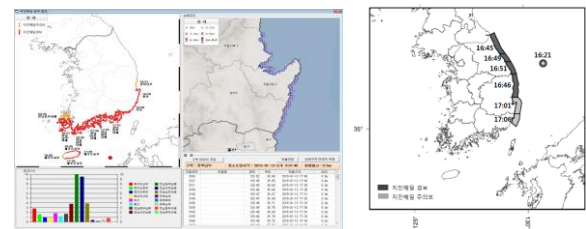


Figure 2. Examples of (left) searched result of scenario tsunami database and (right) tsunami report in district base which would be adopted in the near future.

DEVELOPMENT OF EARLY WARNING SYSTEM FOR LARGE PACIFIC TSUNAMIS

The scenario tsunami database covers only the surrounding seas of the peninsula and KMA relies on tsunami information by other countries for the tsunami warning on large tsunami in the Pacific Ocean. Tsunami generated by the 2011 Tohoku, Japan earthquake (M9.0) was huge enough to be observed in South Korea (less than 50 cm), even though the earthquake occurred in

eastward from Japanese Islands. Furthermore, megathrust earthquakes similar to the 1707 Hoei, Japan earthquake may be expectable in the southern part of Japan and their tsunamis might reach to the southern coast of South Korea. Therefore, tsunami warning system for tsunamis in the Pacific Ocean is needed to issue tsunami information and prepare for the tsunami beforehand. The National Institute of Meteorological Research (NIMR), KMA is developing global tsunami warning system to predict tsunami heights and arrival times to South Korea.

Our developing global tsunami warning system consists in mainly two stages. First stage is to estimate slip distribution on the fault plane generating the earthquake. Usually slip distribution is obtained by seismic waveform inversion using Green's functions from each grid point on the fault plane to stations and matching the synthetic waveforms with observed data. To get slip distribution soon after the occurrence of a large earthquake, fault size is estimated from the magnitude using empirical relationship and then Green's functions from subfaults within the fault range are used for the inversion. For real-time operation, Green's functions are calculated in advance. Spectral Element Method (SEM; Komatitsch et al., 2005) based on 3D velocity model, S362ANI (Kustowski et al., 2008), was used for the calculation of Green's functions from each unit subfault to station (Baag et al., 2015). Unit subfault is assumed to have dimension of $50 \text{ km} \times 50 \text{ km}$ along major subduction zones (Fig. 3 left) and to vary dip angle as the depth deepens, using Slab 1.0 model (Hayes et al., 2012). When a large earthquake occurs, the slip distribution on the fault plane is obtained in a few minutes using the already calculated Green's functions and is used to estimate the surface deformation which can be assumed to be the same as the initial tsunami height.

Second stage is to simulate tsunami propagation and calculate tsunami heights and arrival times on the coast of South Korea. To secure the accuracy on tsunami height, fine grid of bathymetry in the surrounding seas of the peninsula is considered in tsunami propagation model. We are developing tsunami simulation model based on Finite Volume Coastal Ocean Model (FVCOM) to construct fine grid around the Korean peninsula as well as around the fault plane (NIMR, 2014). Because FVCOM is parallelized code-based algorithm, it is expected to get tsunami simulation result before the tsunami in the Pacific Ocean reaches to the Korean peninsula.

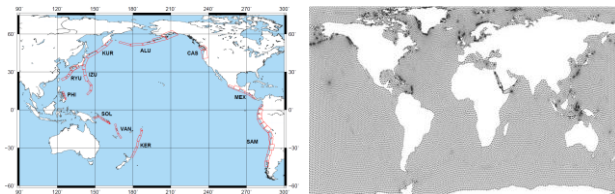


Figure 3. (left) Regions (red boxes) that subfaults are assumed along subduction zones (NIMR, 2013). (right) Unstructured grid for the global tsunami simulation (NIMR, 2014).

TSUNAMI OBSERVATION USING SEA LEVEL DATA

KMA has not an automatic or instrumental tsunami observation system at present. To observe tsunami quantitatively, we are developing a tsunami detect and observation algorithm using real-time tidal and surge data. The algorithm consists of several processes, which are de-spiking, gap-filling for missing data (Lee and Park, 2015), de-tiding, detecting tsunami arrival and measuring tsunami height. For detecting tsunami, we apply two algorithms, one being used for Deep-ocean Assessment and Reporting of Tsunami (DART) system (Mofjeld, 1997; Fig. 4 left) and the other using slope of wave height (Bressan and Tinti, 2011). For de-tiding process (Fig. 4 right), we estimate tide at a tide station using T-TIDE code (Pawlowicz et al., 2002). Tsunami height is measured after de-tiding.

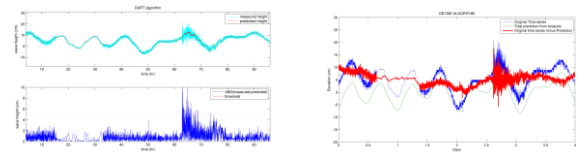


Figure 4. Examples of (left) tsunami detecting and (right) de-tiding.

SUMMARY

We are developing several algorithms and systems to modify the tsunami warning system of KMA and to make the tsunami warning process easier to use and faster to get information and the information more accurate. To get the information faster, we use tsunami database and parallelized code-based tsunami simulation algorithm. We pursue the accuracy by applying seismic waveform inversion process soon after an earthquake and fine grid of bathymetry near the Korean peninsula. To observe tsunami quantitatively, tsunami observation algorithm with tidal and surge data is developing. All these system will be operated in real-time and automatically as much as possible. When these systems are adopted for real-time operation of KMA after verification, they may be contributed to the reduction of tsunami hazards in South Korea.

ACKNOWLEDGMENTS

This study was supported by the 'Research for the Meteorological and Earthquake Observation Technology and its Application' project of the National Institute of Meteorological Research.

REFERENCES

- Baag, S.-Y., J. Rhie, S. Kim, S.-H. Yoo, T.-S. Kang, S. Kim, 2015, Determination of megathrust rupture processes using 3D Green functions for tsunami early warning, *Proceedings of EESK Conference 2015*, pp. 139-140 (in Korean).
- Bressan, L. and S. Tinti, 2011, Structure and performance of a real-time algorithm to detect tsunami or tsunami-like alert conditions based on sea-level records analysis, *Natural Hazards and Earth System Science*, 11, p. 1499-1521.
- Choi, B.-H., Yoon, S.-B. and Cho, Y.-S., 2009, *Tidal hazards*, Seoul, South Korea, Hallimwon, pp. 36-39 (in Korean).
- Hayes, G.P., D.J. Wald and R.L. Johnson, 2012, Slab 1.0: A three-dimensional model of global subduction zone geometries, *Journal of Geophysical Research*, 117, B01302, doi:10.1029/2011JB008524.
- Lee, H.-J., Y.-S. Cho and S.-B. Woo, 2005, Quick tsunami forecasting based on database, *Tsunamis: Case Studies and Recent Developments*, Netherlands, Springer, pp. 231-240.
- Kim, H.-S., K.-S. Moon, and S.-C. Park, Quick tsunami forecasting based on database of unit tsunami propagation simulation, 2013, *Proceedings of the 37th KOSME fall conference*.
- Komatitsch, D., S. Tsuboi and J. Tromp, 2005, The spectral-element method in seismology, *Seismic Earth: Array analysis of broadband seismograms*, AGU, pp. 205-227.
- Kustowski, B., G. Ekström and A.M. Dziewoński, 2008, Anisotropic shear-wave velocity structure of the Earth's mantle: A global model, *Journal of Geophysical Research*, 113, B06306, doi:10.1029/2007JB005169.
- Lee, J.-W. and S.-C. Park, 2015, Artificial Neural Network-based data recovery system for the time series of tide stations, *Journal of Coastal Research*, in press.
- Mofjeld, H.O., 1997, Tsunami detection algorithm, unpublished paper: http://nctr.pmel.noaa.gov/tda_documentation.html
- NIMR, 2013, Research for the Meteorological and Earthquake Observation Technology and its Application (II), Research report (in Korean).
- NIMR, 2014, Research for the Meteorological and Earthquake Observation Technology and its Application (III), Research report (in Korean).
- Pawlowicz, R., B. Beardsley and S. Lents, 2002, Classical tidal harmonic analysis including error estimates in MATLAB using T-TIDE, *Computers and Geosciences*, 28, p. 929-937.